

# Elite Sheet Piling Ltd


## Movax Side Grip Specialists

### DX TECHNICAL DATA

#### PILE TYPES

TYPICAL PILES DRIVEN SINGLY OR IN PAIRS. Most Arcelor AZ and AU14 piles. Also, LX / PU / W Ranges, Hoesch H1200 to H3600, 'H' Piles, HP260 to HP400, USA HP10" to HP16". Tubes up to 406mm Dia (16") Rail Standard 610mm & 762mm Diameter tubes, Plus many others...

PERFORMANCE DATA	RAM MASS	MAX. IMPACT ENERGY	BLOW RATE @ RATED ENERGY	OPERATING PRESSURE	HYDRALIC OIL FLOW REQUIRED
MODEL	Kg	kNm	bpm	Bar	L/min
DX20	1500	20	60	160	130
DX25	2000	25	60	160	150
DX30	2500	30	60	180	170

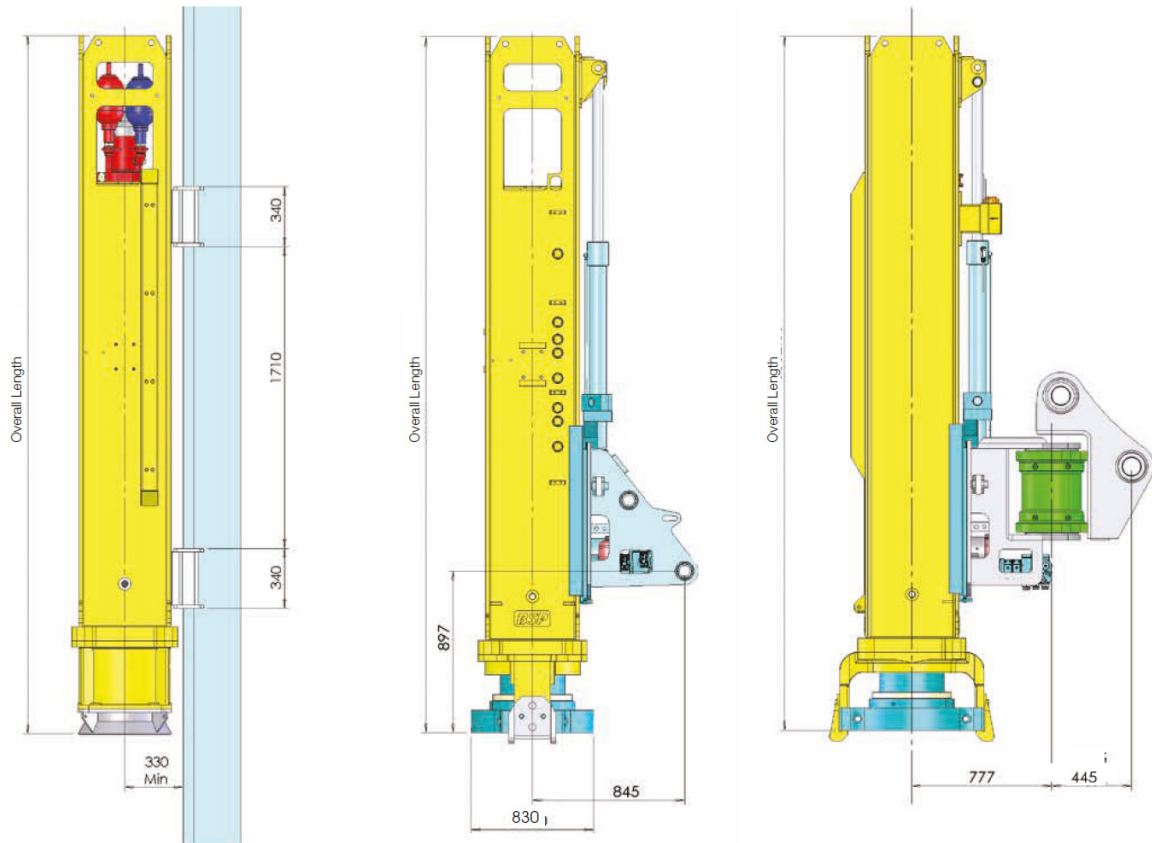

DX LEADER MOUNTED

DX-RT RAIL TRACK APPLICATION

DX-SP SHEET PILING APPLICATION

SPECIFICATIONS	*OVERALL LENGTH	*HAMMER WIDTH	DX	*HAMMER MASS	SP
	DX RT SP	DX RT SP		RT	
MODEL	mm	mm		Kg	
DX20	4000	600	3900	4350	5500
DX25	4000	600	4500	4950	6000
DX30	4300	600	5500	5750	6800

\* Dimension depending on hammer configuration.