

# Elite Sheet Piling Ltd

Movax Side Grip Specialists


## BPS DX25

### DX TECHNICAL DATA

#### PILE TYPES

TYPICAL PILES DRIVEN SINGLY OR IN PAIRS. Most Arcelor AZ and AU14 piles. Also, LX / PU / W Ranges, Hoesch H1200 to H3600, 'H' Piles, HP260 to HP400, USA HP10" to HP16". Tubes up to 406mm Dia (16") Rail Standard 610mm & 762mm Diameter tubes, Plus many others...

PERFORMANCE DATA	RAM MASS	MAX. IMPACT ENERGY	BLOW RATE @ RATED ENERGY	OPERATING PRESSURE	HYDRALIC OIL FLOW REQUIRED
MODEL	Kg	kNm	bpm	Bar	L/min
DX20	1500	20	60	160	130
DX25	2000	25	60	160	150
DX30	2500	30	60	180	170

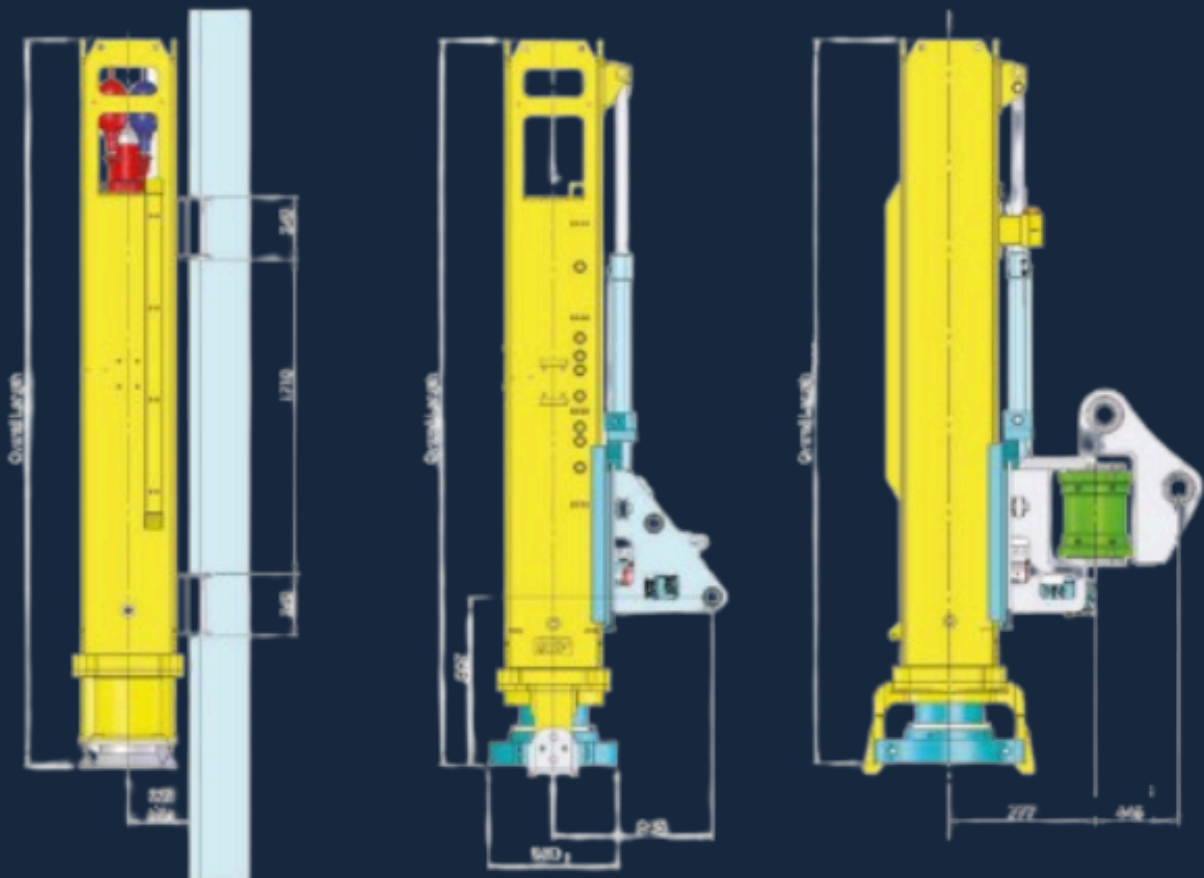

SPECIFICATIONS	*OVERALL LENGTH DX RT SP	*HAMMER WIDTH DX RT SP	DX	*HAMMER MASS	
	mm	mm		RT	SP
MODEL	mm	mm		Kg	
DX20	4000	600	3900	4350	5500
DX25	4000	600	4500	4950	6000
DX30	4300	600	5500	5750	6800